




CABLE 109

Hose Construction

- Tube:** Black, smooth, SBR rubber compound
- Reinforcement:** Synthetic textile fabrics
- Cover:** Black, abrasion, ozone and weather-resistant, SBR rubber compound

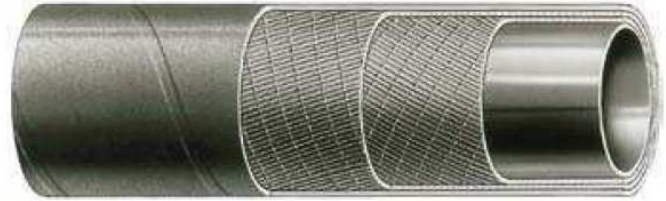

Applications

Extra light-weight and flexible, recommended for protection and carrying welding and industrial cable.

Temperature Range

-20 °C (-4 °F) to +80 °C (+176 °F)

Tolerances

RMA steel mandrel

On inside diameter:

≤ I.D. 38 mm: ± 0,79 mm

> I.D. 38 mm: ± 1,59 mm

On outside diameter:

± 1,59 mm

Length tolerance:

± 1 %

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36832047/40	35	37	-	-	-	-	-	-	0,12	-
IH36832049/40	38	42	-	-	-	-	-	-	1,00	-
IH36832040/40	40	43	-	-	-	-	-	-	0,61	-
IH36832048/40	45	47	-	-	-	-	-	-	0,20	-

Zapraszamy do dystrybutora PARKER ITR:

HOSEMANN POLSKA

www.hosemann.pl

biuro@hosemann.pl